



1




Start the replacement process by having your unit facing you.

2




Using a 2.5mm hex key, remove the top screw on each side.

3

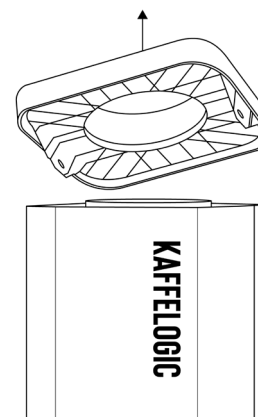


Carefully lift off the top closure making sure not to move the roast chamber.

4

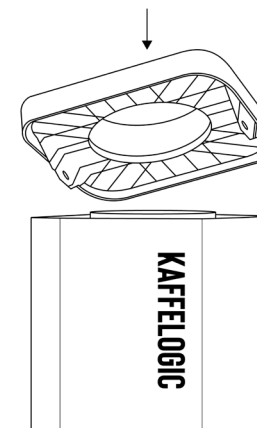

Place the new closure into your unit carefully. Line up the screw holes on the closure with the ones on the panels.


5

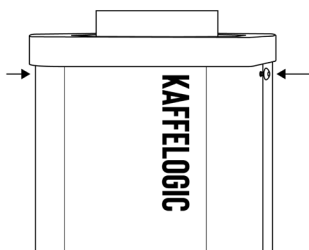

Reinsert the 2 screws removed in step 2. Make sure not to over tighten these. You may need to squeeze the panels together to line up the screw holes.

INCONSISTENT ROAST AFTER TOP CLOSURE REPLACEMENT?

If you find that your unit is not functioning as it was prior to the top closure replacement then you may need to recalibrate your unit. This can happen if the roast chamber moves. To recalibrate your unit please reach out to support@kaffelogic.com so that we can guide you through the process.

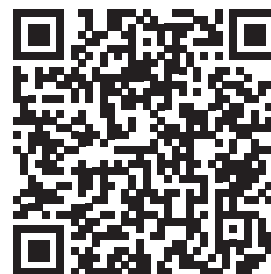

KAFFELOGIC
TOP CLOSURE
REPLACEMENT GUIDE